



## INSTALLATION INSTRUCTIONS PEEL & STICK WOOD WALL PLANKS

---

### RECOMMENDATIONS PRIOR TO INSTALLATION:

Thank you for your purchase of our peel and stick real wood wall planks! Since our wood planks are made from real natural pine wood its normal to see slight design variations of wood grain and texture. Our wood planks offer uniqueness and authenticity that will provide a warm and elegant look to your walls for years to come!

- Wood Planks are for interior use only and should not be used for flooring.
- Allow planks to acclimate for 48-72 hours in the room to be installed in.
- Room temperature should be maintained between 18° and 30° Celsius ( 65°F and 85°F) and maintain the indoor relative humidity between 40% - 60% at all times.
- Not recommended in high damp areas (e.g. full bath with shower) and high temperature areas exceeding 50°C (125°F) e.g. fireplace surround.
- Layout several rows of planks on the floor to see your design and mix textures and variations to see the look you want before installing them to the wall especially if you will be mixing colors.

### REQUIRED TOOLS AND MATERIALS:

- Pencil
- Level
- Measuring Tape
- Protective Glasses and Dust Mask
- J-Roller

CUTTING: Manual or Jig Saw (fine tooth), Utility Knife or Miter Saw


### PREPERATION:

- Installation steps may vary according to the desired look you want to achieve. Plan the layout style as per our available chart below and make your starting line on the wall.
- Our wood planks can be installed on flat smooth drywall ( painted, primed or unpainted).
- Clean the wall surface and remove any debris, dust or chipping paint and ensure its dry.
- Remove any outlet plates and maintain caution around outlets and switches.

## INSTALLATION STEPS ( Horizontal Layout ):

1. Start the installation at the top of the wall. Do not follow the ceiling line as it may not be level. Therefore start about 6" down from the top and use your level to draw a straight reference line with your pencil. This will be your starting point and guide for your first row.
2. Remove the protective film from the adhesive strips on the back of the first board and place the bottom edge of the plank along the reference line, Once the full length of the board sits accurately along the line you can stick it down and press firmly along the full plank. Use your level on the first board to make sure it is level as once the adhesive is set it will be hard to remove the board.
3. Repeat the process with laying the first row of planks along your reference line and lining up next to your previous installed plank.
4. We recommend installing the boards from left to right, taking the cut board and starting back to the left of next row.
5. For a natural staggered look you may want to mix up the boards so the vertical seams don't all look so uniform but this depends on the look you want to achieve depending on the horizontal layout.
6. You will likely have to (rip cut) horizontally the bottom and top row boards to fit, measure the width of the last rows for each end of the plank to fit.
7. Once all planks are installed you should go over the entire wall with a J-Roller to ensure that even pressure is applied to the entire surface.

## DESIGN LAYOUTS

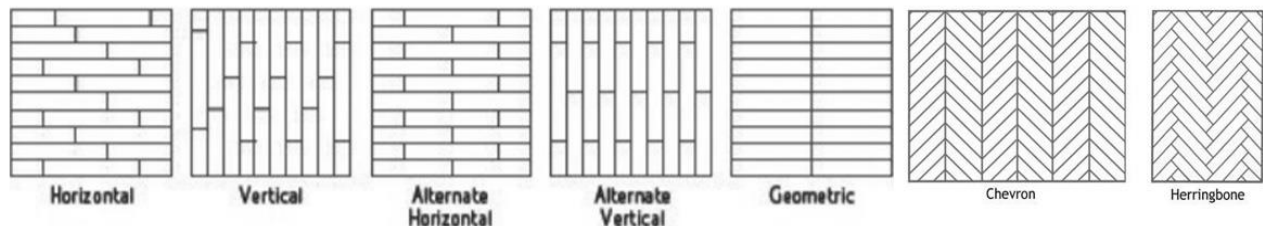

## MAINTENANCE CARE & TIPS:

Do not apply water to the surface. Use a soft and dry cloth or brush.  
Do not use any abrasive cleaners on your wall.

**ENJOY YOUR BEAUTIFUL WALL!**

[WWW.WALLDECOR3D.COM](http://WWW.WALLDECOR3D.COM)



## HERRINGBONE INSTALLATION PEEL & STICK WOOD WALL PLANKS

---

Your first board is the most important plank to place correctly and the rest aligns with the first board. Measure and draw a center line down the center of the wall with your pencil and use your level to make sure its straight.

Next place the first (1) panel corner on the line and use a speed square to make sure that you have an angle of  $45^\circ$  between the center line and the board ( You can also pre draw the  $45^\circ$  on the plank and align the top corner and next point down to make it easier when adhering the plank to wall ).

Next align board (2) and you now have your starting triangle. From here you work on the next inner triangle going down the wall. After you finish your full plank triangle pieces you can work on your wing pieces.

